


Centrifugal separation Light weight cleaner LT3

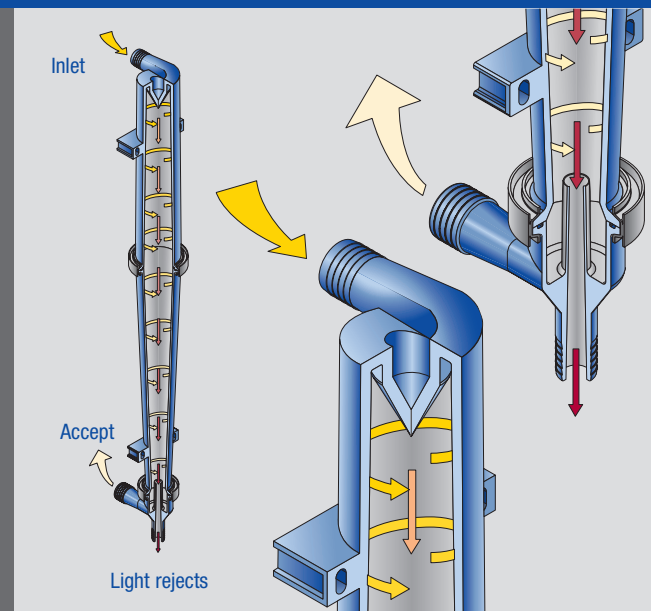

Applications

- Separation of specific light contraries such as styrofoam, wax, stickies, adhesives as well as air
- Postcleaning of the Combicleaner light reject
- Application for stock preparation and approach flow system

Features

- Co-current cleaner without cross-flow or short-circuit flows
- Large overflow cross-section ensures blockage free operation and low pulsation
- Compact and easy to maintain bank design for up to 70 cleaner
- Final stages with integrated fiber recovery unit

Technical data

Type		LT3
Admissible operating pressure max.	[bar]	4
Admissible operating temperature max.	[°C]	70
Nominal pressure drop Inlet – Accept	[bar]	1.5
Nominal inlet flow	[l/min]	160
Accept pressure min.	[bar]	0.5
Max. consistency	[%]	1.5

Voith Paper Fiber Systems
GmbH & Co. KG
Escher-Wyss-Straße 25
88212 Ravensburg/Germany
Tel. +49 751 8301
Fax +49 751 832050

Voith Paper Inc.
2200 N. Roemer Road
Appleton, WI 54911 / USA
Tel. +1 920 731-7724
Fax +1 920 731-0240

Voith Paper S.A.
Rua Friedrich von Voith, 825
02995-000 São Paulo-SP / Brazil
Tel. +55 11 39 44-4354
Fax +55 11 39 44-4848

www.voithpaper.com

VOITH
Engineered reliability.